



**RICHARDS BAY CLEAN AIR
ASSOCIATION
DUST DEPOSITION MONITORING
JUNE 2009
Sampling period: 18 May – 17 June 2009
Final Monthly Progress Report**

Contact Person: Q. Hurt
Designation: Managing Director
Contact Person: M. Antoni
Designation: Consultant

Address: Richards Bay Clean Air Association
PO Box 10299
Meerensee
3901

Project Leader: H.J. Annegarn
Project Officers: L. Khumalo
T. Masethe

Address of Testing laboratory: ECOSERV
Unit 7, Ground Floor
Haiti Mall
Richards Bay

Date of Report: 07 July 2009
Report Number: AER 29.347 M_RBCAA

This document is issued by the Company under its General Conditions of Service accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The findings report on the samples provided by the client and are not intended for commercial or contractual settlement purposes since there is no traceability to any goods in particular. Any dispute on the findings reported hereon shall be settled by comparison of these findings with the subsequent findings made on the sub-samples retained for arbitration purpose. Unless otherwise agreed, samples retention and statute of limitation for claims is three (3) months from issuance of the present document. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

1. METHODOLOGY

This project commenced operation in June 2006. Windblown settleable dust (fall-out) is monitored based on the American Society of Testing and Materials standard method for collection and analysis of dustfall (ASTM D1739), with certain modifications. This method employs a simple device consisting of a cylindrical 5l container half-filled with de-ionised water exposed for one calendar month (30 ± 3 days). The water is treated with an inorganic biocide to prevent algal growth in the buckets. The most common reagent used for this is a 5% copper sulphate solution (approximately 1 ml per 3 litre of water bucket).

The bucket stand comprises a ring that is raised above the rim of the bucket to prevent contamination from perching birds (Fig 1). The bucket holder is connected to a 2.1 m galvanized steel pole, which is either directly attached to a fence post or can be attached to a galvanized steel base plate, which is buried to a depth of 500 mm. This allows for a variety of placement options for the fallout samplers. Exposed buckets, when returned to the AER laboratories, are rinsed with deionised water to remove residue from the sides of the bucket, and the bucket contents filtered through a coarse ($>1\text{mm}$) filter to remove insects and other coarse organic detritus. The sample is then filtered through a pre-weighed paper filter to remove the insoluble fraction, or dust fallout. This residue and filter are dried, and gravimetrically analysed to determine the insoluble fraction (dust fallout).

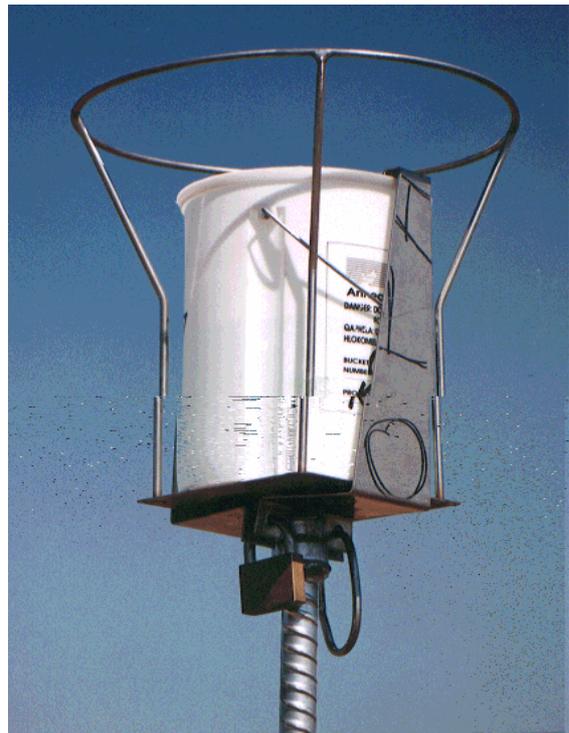


Figure 1: Single bucket monitoring unit, showing sampling bucket with bird ring and security clamp.

1.1 Operational Aspects

The sampling period was from 18 May – 17 June 2009 and samples were exposed for 30 days. The period complies with the standard exposure period of 30 ± 3 days. It was noted that there is construction and blasting activity closer to Site 3 (Alton South West). In the vicinity of site 4 (Harbour West Station) the number of moving vehicles has increased due to the Transnet Permit office which is now located nearby the station. No other operational problems were encountered and a valid sample return of 100% was achieved.

2. STANDARDS FOR DUST DEPOSITION

The Standards South Africa has published a new set of dustfall standards (SANS 1929:2005). These standards have been used to evaluate the level of dust deposition and are stated in Table 1 and Table 2 below.

2.1 Evaluation criteria for dust deposition

Dust deposition rates shall be expressed in units of $\text{mg}/\text{m}^2/\text{day}$ over a 30-day averaging period. Dust deposition is evaluated against a four band scale as presented in Table 1. The target, action and alert thresholds for ambient dust deposition are indicated in Table 2. Permissible margins of tolerance are outlined in 2.2, and exceptions noted in 2.3.

Table 1: Four-band scale evaluation criteria for dust deposition (SANS 1929:2005).

Band Number	Band Description Label	Dustfall rate (D) ($\text{mg}/\text{m}^2/\text{day}$, 30-day average)	Comment
1	Residential	$D < 600$	Permissible for residential and light commercial
2	Industrial	$600 < D < 1\ 200$	Permissible for heavy commercial and industrial
3	Action	$1\ 200 < D < 2\ 400$	Requires investigation and remediation if two sequential months lie in this band, or more than three occur in a year.
4	Alert	$2\ 400 < D$	Immediate action and remediation required following the first incidence of dustfall rate being exceeded. Incident report to be submitted to relevant authority.

Table 2. Dustfall standards, target, action and alert thresholds for dust deposition (SANS 1929:2005).

Level	Dustfall Rate ($\text{mg}/\text{m}^2/\text{day}$)	Permitted Frequency of Exceedances
Target	300	
Action residential	600	Three within any year, no two sequential months.
Action industrial	1 200	Three within any year not sequential months.
Alert threshold	2 400	None. First exceedance requires remediation and compulsory report to authorities.

2.2 Margin of tolerance

An enterprise may submit a request to the authorities to operate within band 3 (action band), as specified in Table 1, for a limited period, provided that this is essential in terms of the practical operation of the enterprise (for example the final removal of a tailings deposit) and provided that an appropriate control technology is applied for the duration. No margin of tolerance will be granted for operations that result in dustfall rates which fall within band 4 (alert band) as specified in Table 1.

2.3 Exceptions

Dustfalls that exceed the specified rates but that can be shown to be the result of some extreme weather or geological event shall be discounted for the purpose of enforcement and control. Such event might typically result in excessive dustfall rates across an entire metropolitan region, and not be localized to a particular operation. Natural seasonal variations, for example, the naturally windy months each year, will not be considered extreme events for this definition.


2.4 Application of standards

Dust deposition rates recorded at RBCAA are appraised according to the standards published by the Standards South Africa (SANS 1929:2005). Dustfall rates within the RESIDENTIAL and INDUSTRIAL ranges do not result in complaints from the public. ACTION and ALERT ranges, generally result in complaints from the public, and therefore considered to be action levels, at which sources of excessive dust must be investigated (if not known) and suitable mitigation measures instituted.

3. RESULTS

During the June 2009 reporting month, all the monitoring sites recorded dustfall rates within the RESIDENTIAL threshold. Site 4 (Harbour west station) recorded the highest dustfall of 370 mg/m²/day, due to high volume of moving vehicles closer to the site as a result of Transnet permit office which is now located nearby the site. Trends of the dust fallout results per site are presented in Appendix A of this report.

Figure 1: Graph showing results from all sites: June 2009


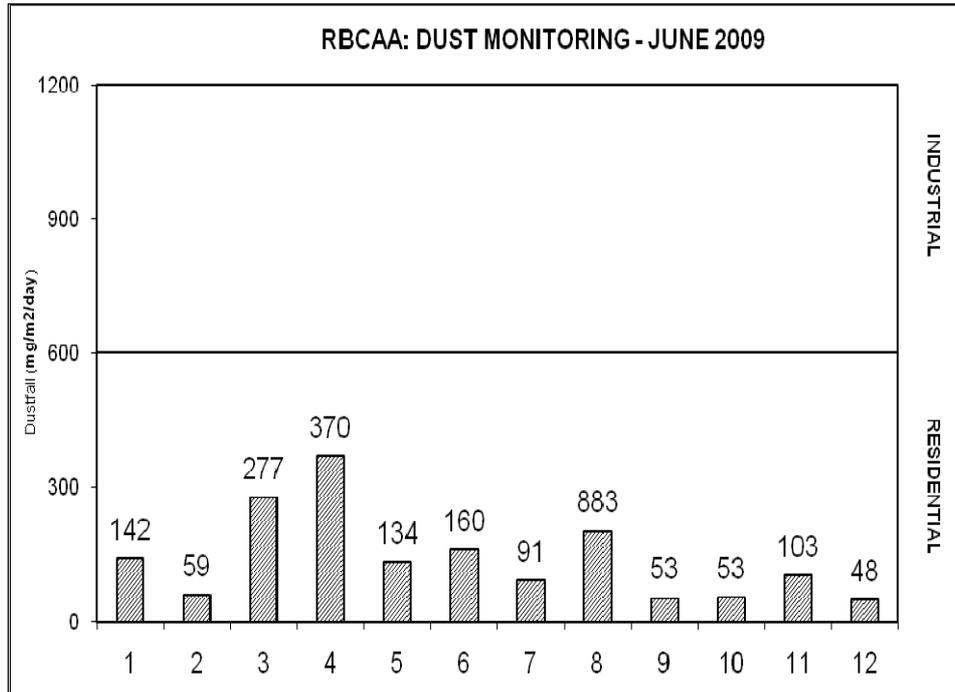




RBCAA DUSTFALL MONITORING			Month: June 2009 Sampling period: 18 May– 17 June 2009			
SITE DESCRIPTION	SITE CLASSIFICATION	SITE No.	FILTER CODE	NETT MASS (mg)	No. DAYS	DUST FALLOUT (mg/m ² /day)
Brackenham	RESIDENTIAL	1	RBCAA 09/277	96	30	142
SAPS Garage	RESIDENTIAL	2	RBCAA 09/278	40	30	59
Alton South West	INDUSTRIAL	3	RBCAA 09/279	189	30	277
Harbour West	INDUSTRIAL	4	RBCAA 09/280	253	30	370
CBD(Municipal office)	RESIDENTIAL	5	RBCAA 09/281	91	30	134
Scorpio	INDUSTRIAL	6	RBCAA 09/282	109	30	160
Alton fire station	RESIDENTIAL	7	RBCAA 09/283	62	30	91
Nseleni Municipal office	RESIDENTIAL	8	RBCAA 09/284	138	30	202
Empangeni police station	RESIDENTIAL	9	RBCAA 09/285	36	30	53
Felixton Village	RESIDENTIAL	10	RBCAA 09/286	36	30	53
Arboretum	INDUSTRIAL	11	RBCAA 09/287	70	30	103
Meerensee School	RESIDENTIAL	12	RBCAA 09/288	33	30	48



Comment:



Specific Test Conditions	Samples stored at room temperature prior to analysis. Filters weighed at constant mass
Deviations From Method	None.
Measurement Uncertainty	± 5%



**APPENDIX A
RBCAA DUST FALLOUT MONTHLY TIMEPLOTS 2007 – 2009**

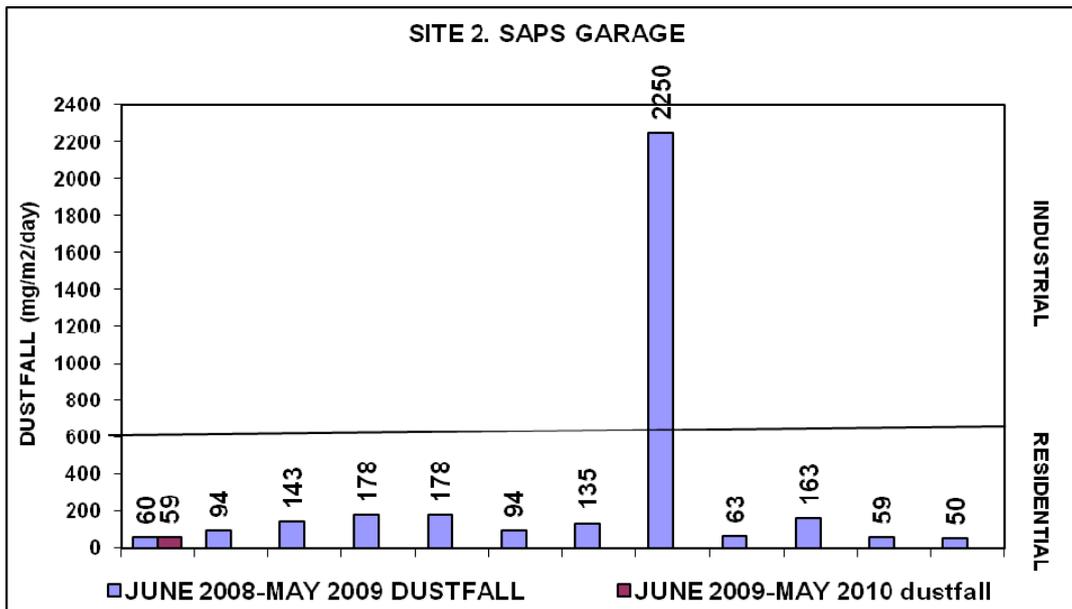
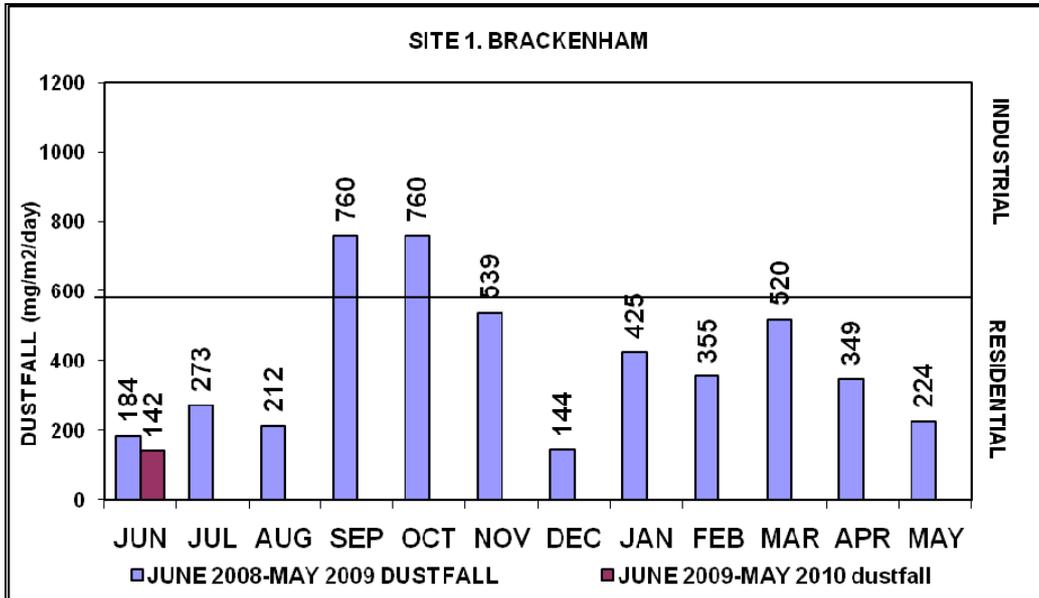


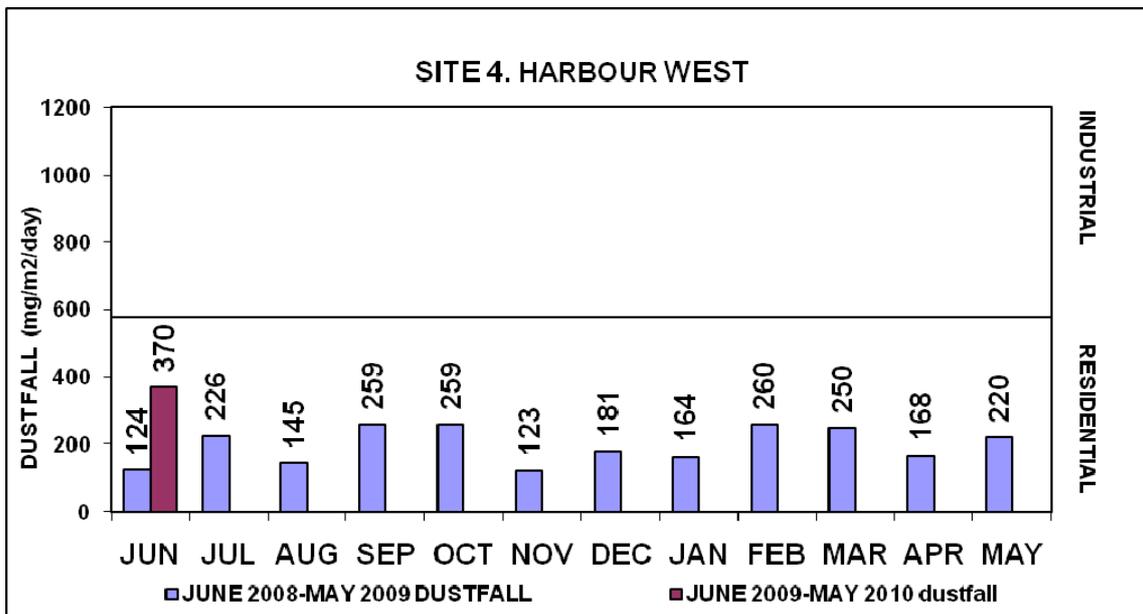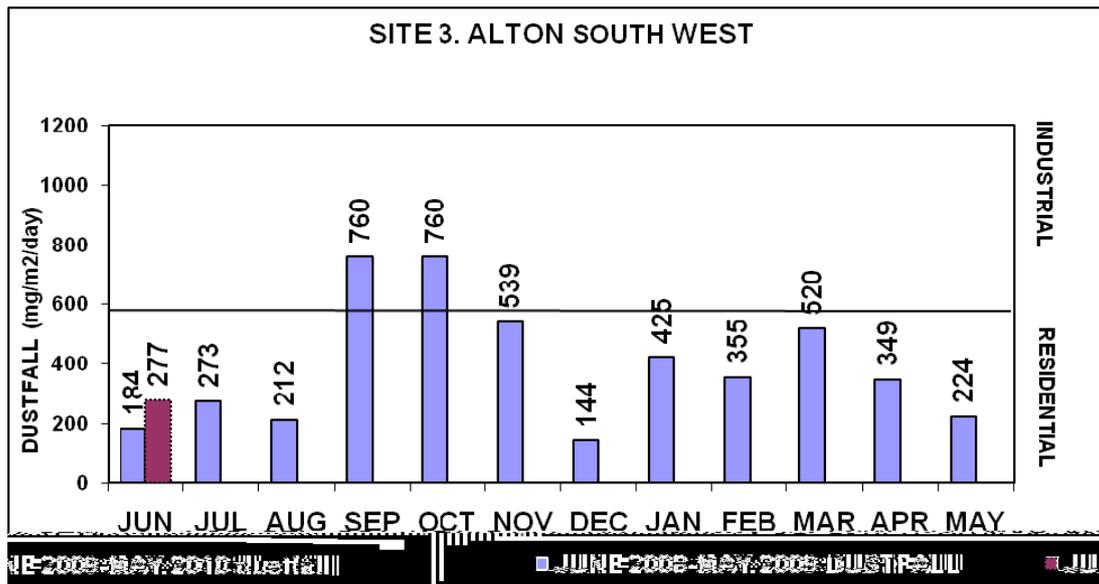

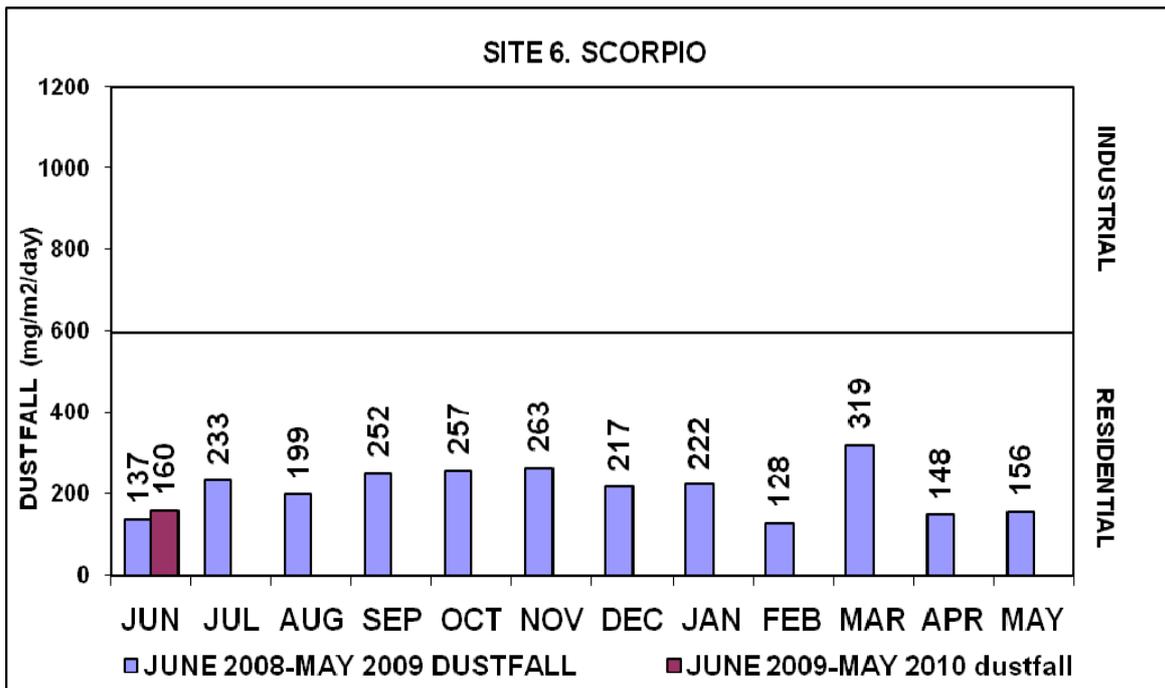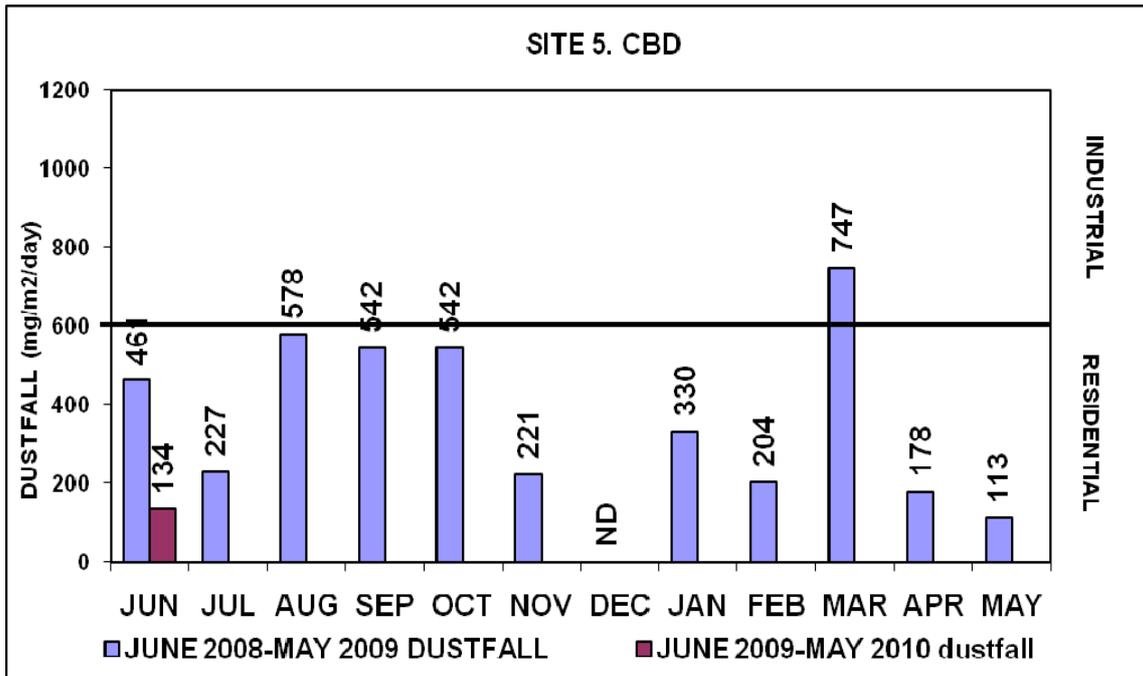

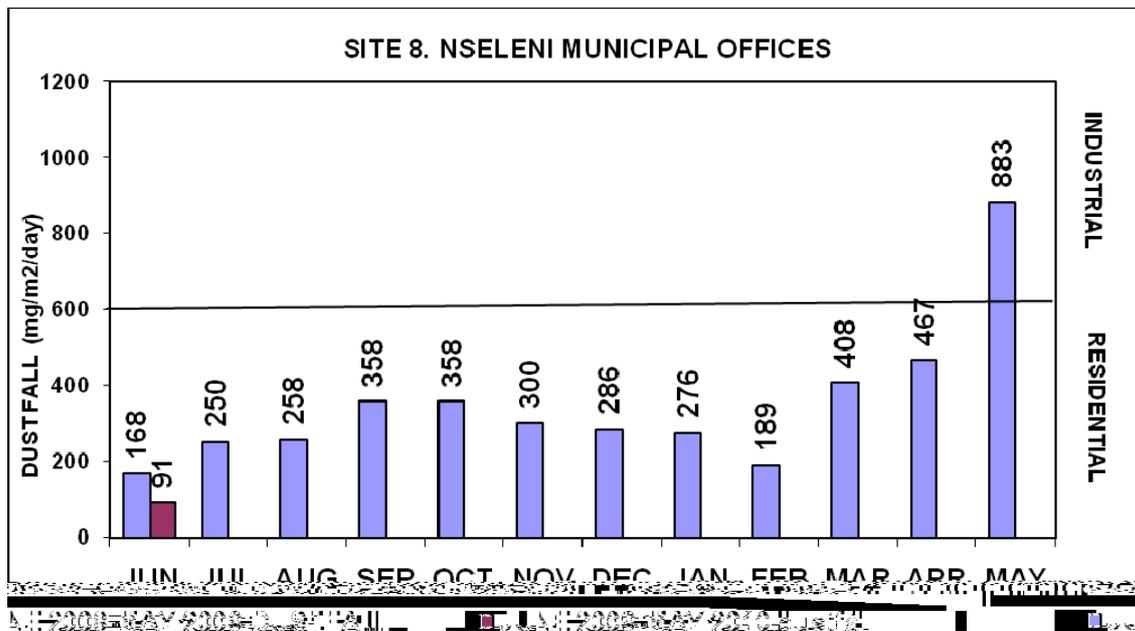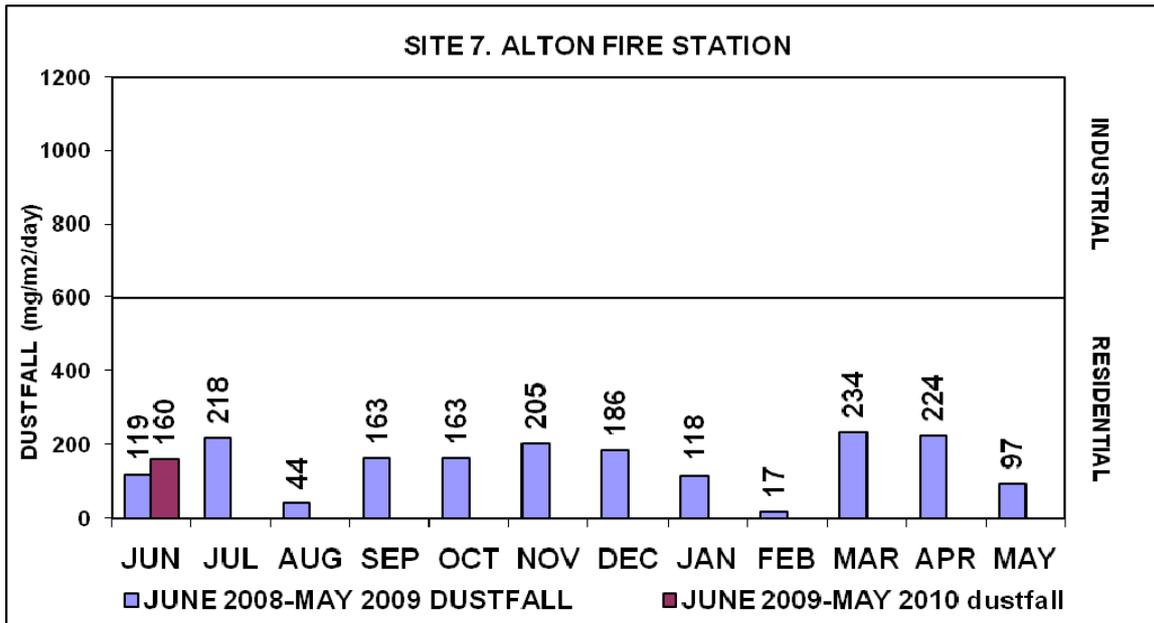

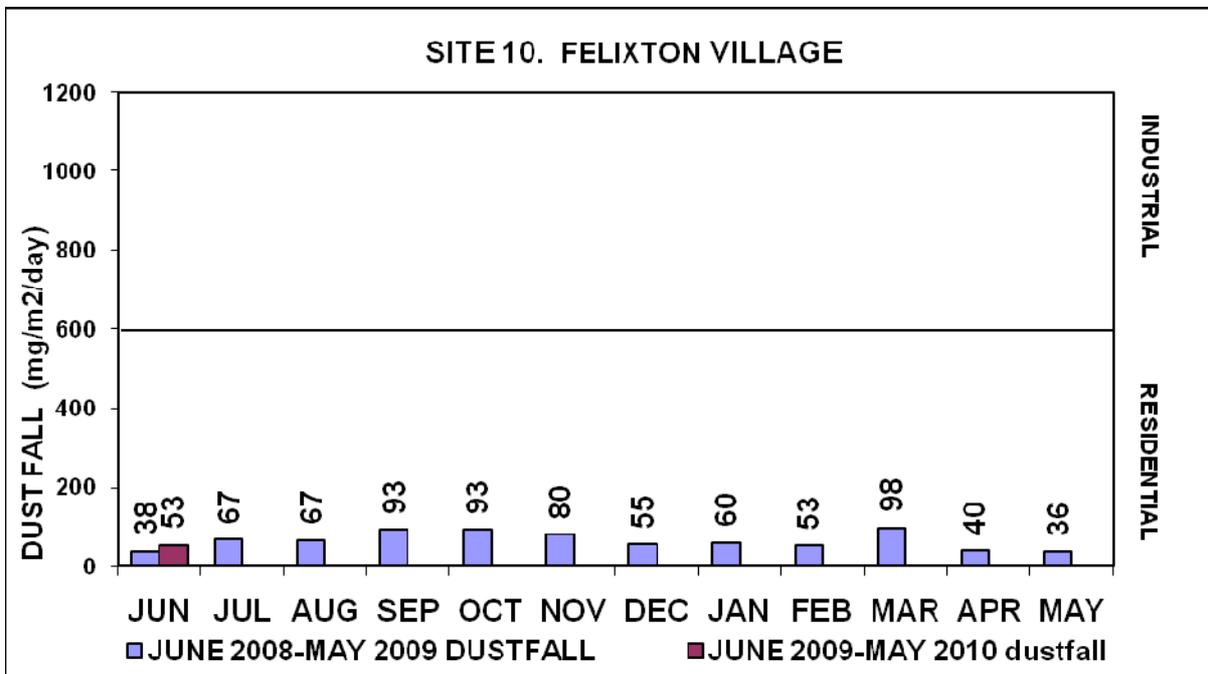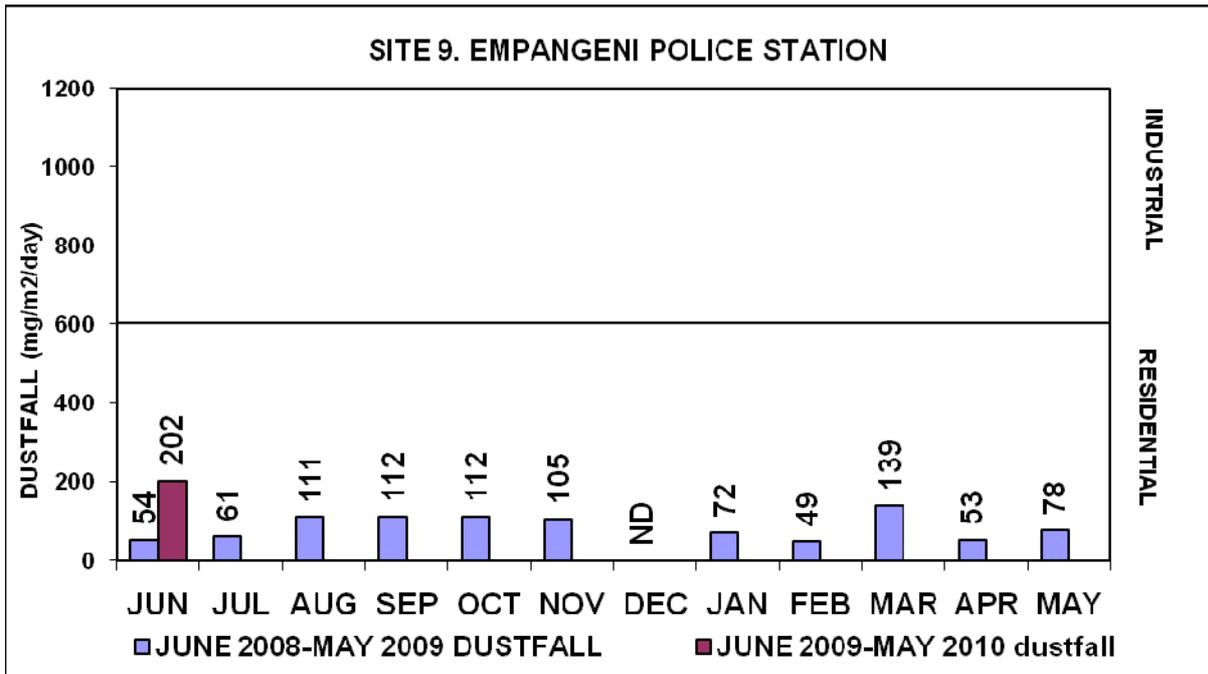

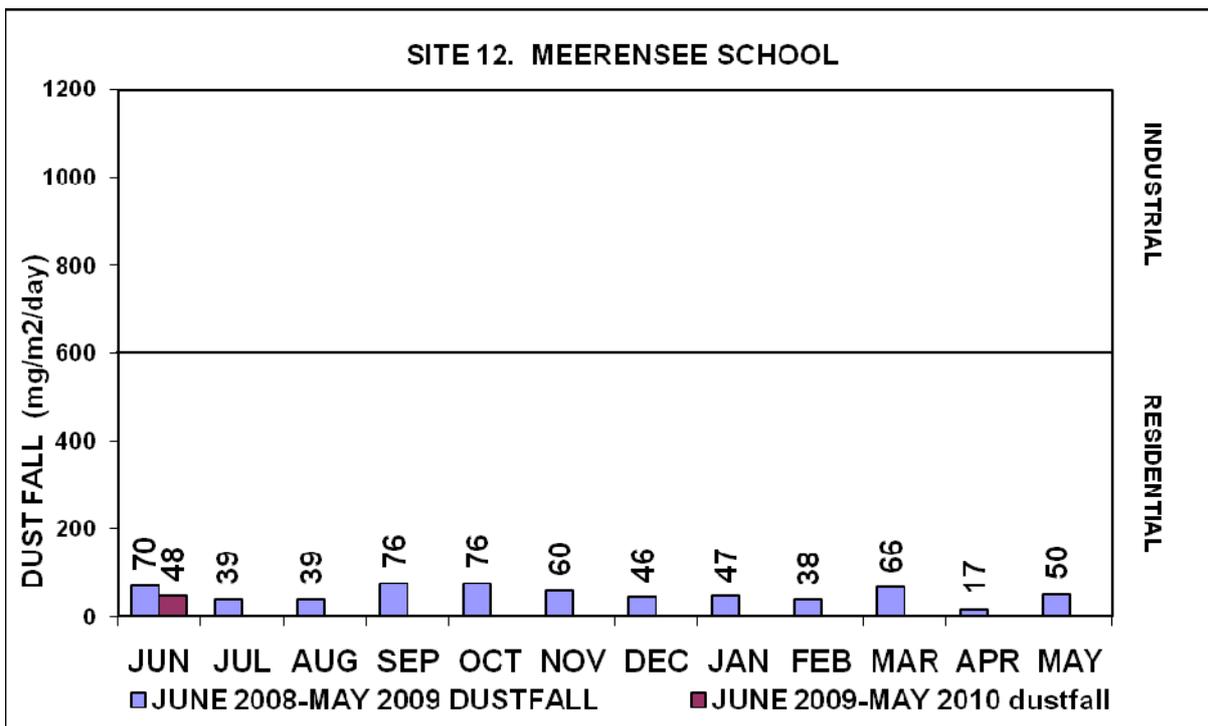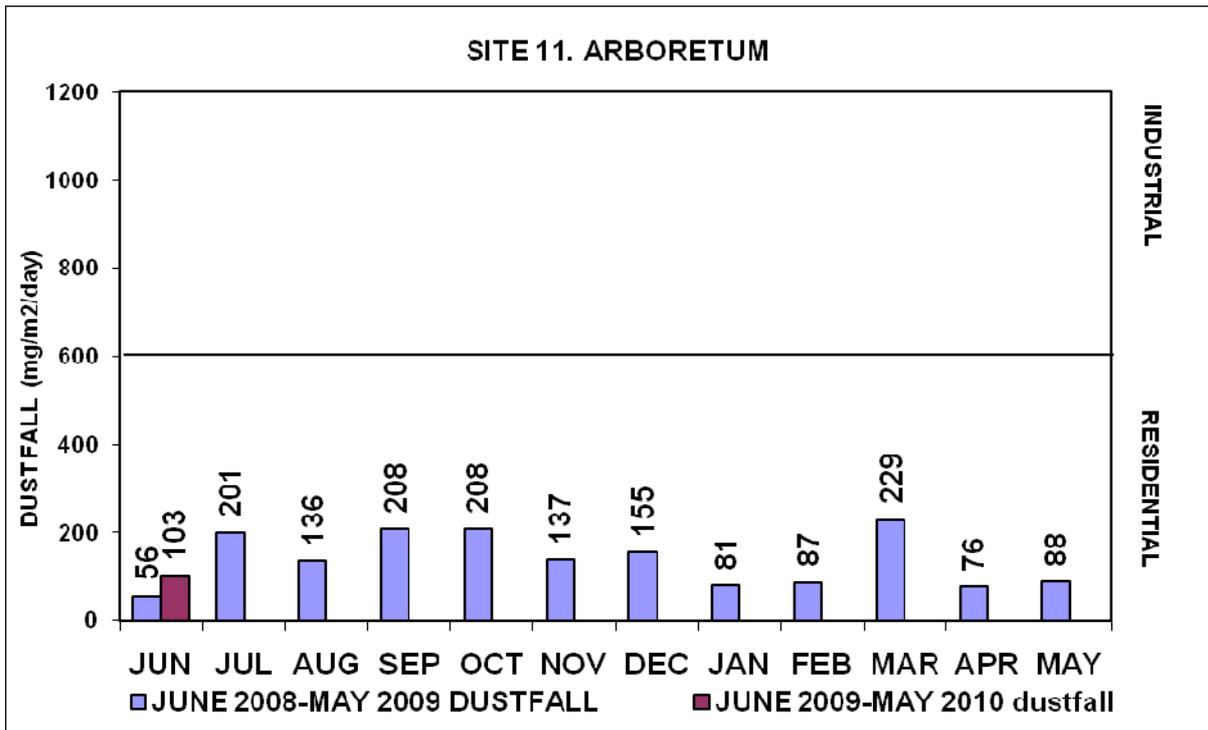

APPENDIX B:

Sample Locations of all sites



All the sites are currently being reviewed. When they are reviewed, the results will be reported to the client, including any deviations.